


Voltage Range (Vdc): 18 - 30
Temperature Range (°C): -20 to +70
Flash Rate: c.1Hz (approved)
(option for 0.5Hz does not comply with EN54-23)
Beacon coverage: W-2.4-8 (approved)
(option for W-2.4-8 does not comply with EN54-23)
Monitoring: Reverse Polarity
Protection Rating: IP21C Deep Base
Protection Rating: IP21C Shallow Base
Boxed Weight (kg): 0.25
Base Diameter (mm): Ø93.0
Material: ABS fire retardant plastic
For the installation requirements, use fire rated cable,
2 - core plus screen

Voltage Range
18 - 30Vdc



15
0359-CPR-00473

EN54-23




For any technical queries contact
Tel: +44 (0) 1420 592 444
E-mail: technical@cranfordcontrols.com

Doc Ref: 125-113 Issue: 002 Date 05.2015

Made in UK


Full datasheet available - DS135
www.cranfordcontrols.com

1. N/A
2. N/A
3. (-) Neg
4. (-) Neg
5. (+) Positive
6. (+) Positive

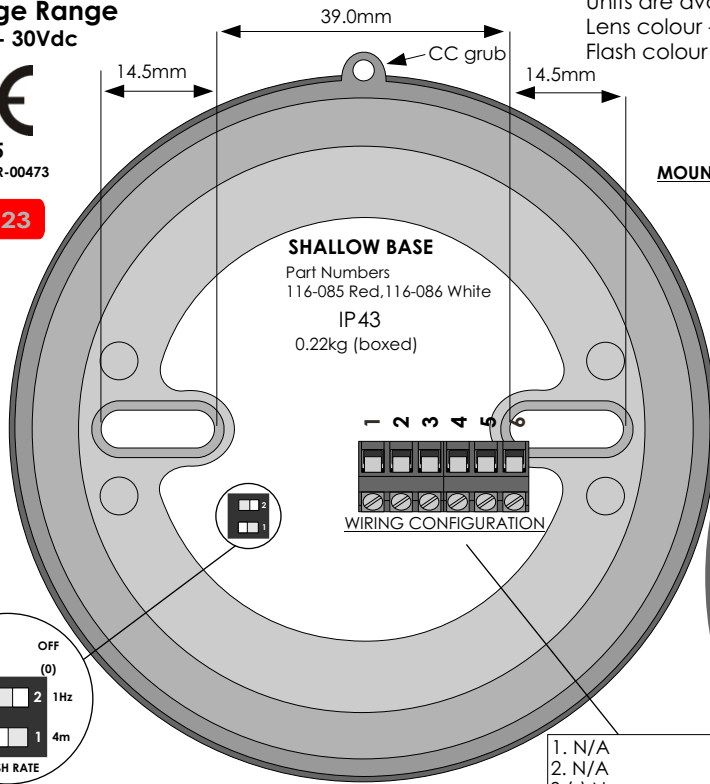


SHALLOW BASE

Part Numbers
116-085 Red, 116-086 White
IP43
0.22kg (boxed)



MOUNTING TEMPLATE

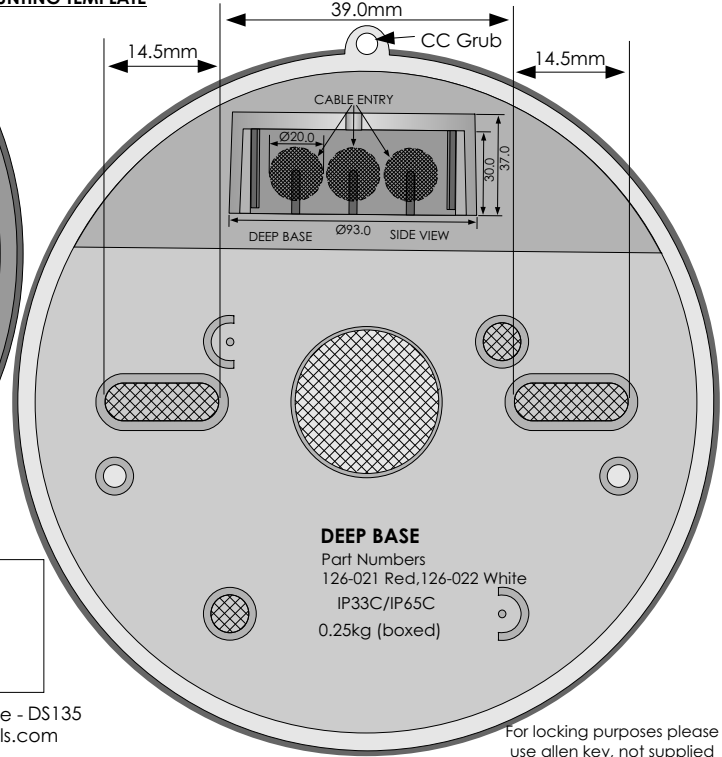

DEEP BASE

Part Numbers
126-021 Red, 126-022 White
IP33C/IP65C
0.25kg (boxed)

For locking purposes please
use allen key, not supplied


Voltage Range (Vdc): 18 - 30
Temperature Range (°C): -20 to +70
Flash Rate: c.1Hz (approved)
(option for 0.5Hz does not comply with EN54-23)
Beacon coverage: W-2.4-8 (approved)
(option for W-2.4-8 does not comply with EN54-23)
Monitoring: Reverse Polarity
Protection Rating: IP21C Deep Base
Protection Rating: IP21C Shallow Base
Boxed Weight (kg): 0.25
Base Diameter (mm): Ø93.0
Material: ABS fire retardant plastic
For the installation requirements, use fire rated cable,
2 - core plus screen

Voltage Range
18 - 30Vdc



15
0359-CPR-00473

EN54-23




For any technical queries contact
Tel: +44 (0) 1420 592 444
E-mail: technical@cranfordcontrols.com

Doc Ref: 125-113 Issue: 002 Date 05.2015

Made in UK


Full datasheet available - DS135
www.cranfordcontrols.com

1. N/A
2. N/A
3. (-) Neg
4. (-) Neg
5. (+) Positive
6. (+) Positive

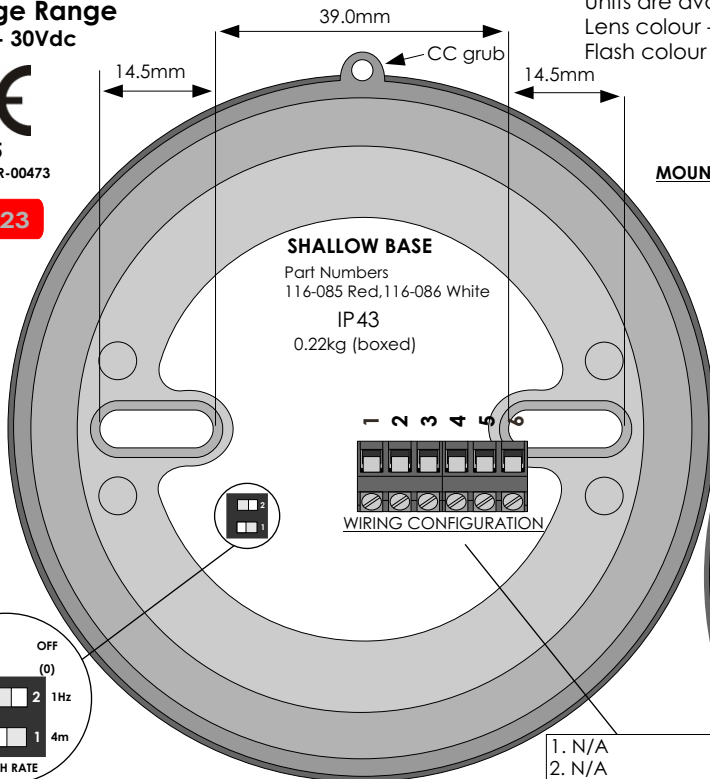


SHALLOW BASE

Part Numbers
116-085 Red, 116-086 White
IP43
0.22kg (boxed)



MOUNTING TEMPLATE

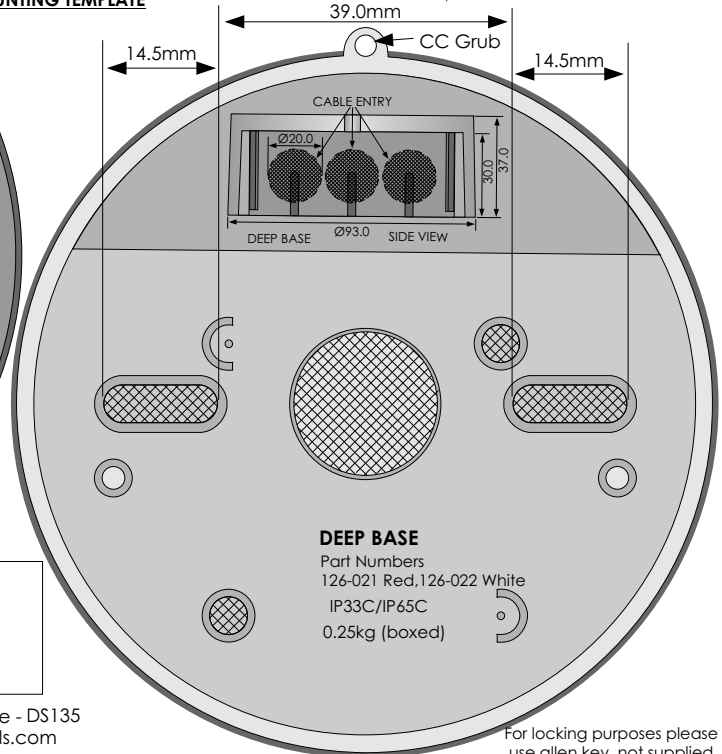

DEEP BASE

Part Numbers
126-021 Red, 126-022 White
IP33C/IP65C
0.25kg (boxed)

For locking purposes please
use allen key, not supplied