

FirePro

2 - 4 ZONE CONVENTIONAL FIRE ALARM PANELS




- » 2 or 4 zones
- » False alarm management mode
- » Twin Wire selection by DIL switch
- » Approved to EN54-2 & 4
- » 12 month warranty
- » Fire & fault relays
- » One man walk test
- » Non latching zones
- » Class change inputs



FirePro

Available with 2 or 4 zones, FirePro is the entry level panel but still has plenty to offer!

With an array of engineering options including Twin Wire setting by DIL switch, programmable zones & outputs, false alarm management mode, non latching zones and class change input the FirePro is the most dynamic entry level fire panel on the market today. The display uses super bright, clearly labelled LED indicators and the colour coded buttons give the end user the confidence to correctly manage their fire alarm system.



Twin Wire Mode

Twin Wire mode saves up to 40% in installation costs by allowing audio visual devices to be connected to the same pair of cables as the detectors & call points. Twin Wire mode requires 'Sav-Wire' detector bases & call points.

Programming Features

- Non latching zones
- Short circuit as alarm zones
- False alarm management mode
- Set Twin Wire mode by DIL switch
- Sounder circuit function programming
- Disable zones, sndr ccts & aux




Simple programming using the four numbered key pad buttons

Technical Specifications	
No of zones	2 or 4
Cabinet size	308mm W x 260mm H x 80mm D
Battery capacity	2 x 3.2Ah 12v SLA
Sounder circuits	2
Power Supply	1.25 amp switch mode

Order Codes

P-8010	Control panel, 2 zones, 2 sounder ccts
P-8011	Control panel, 4 zones, 2 sounder ccts
P-8012	Recessing bezel

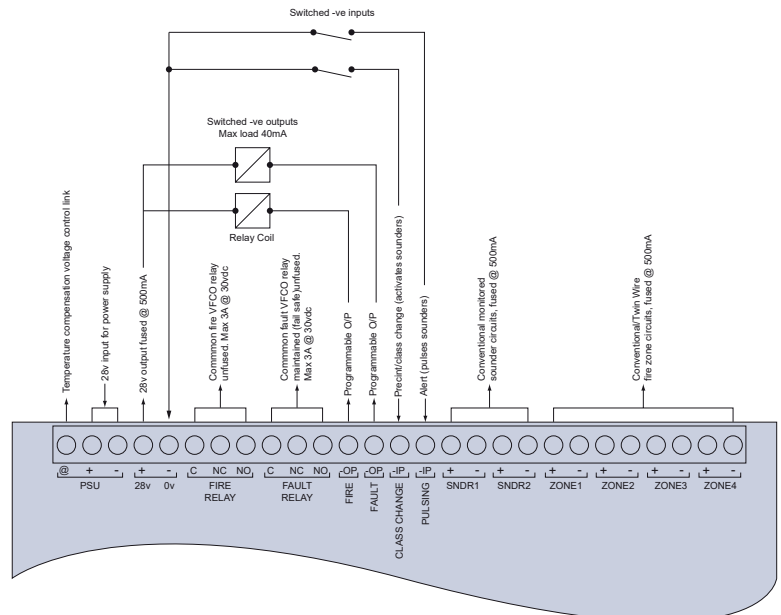

Units 2-4 The Pavilions, Bridgfold Road,
Rochdale OL11 5BY

Tel: 01706 658880
Fax: 01706 658918

Email: sales@eufireandsecurity.com
Web: www.eufireandsecurity.com