

FirePro+

2 - 12 ZONE CONVENTIONAL FIRE ALARM PANELS



- » 2 - 12 zones
- » Network up to 8 control panels
- » 3 modes to manage false alarms
- » Individually selectable Twin Wire zones
- » Approved to EN54-2 & 4
- » 12 month warranty
- » Programmable relays & outputs
- » One man walk test
- » Fully functional repeater panels



FirePro+

FirePro+ fire alarm control panels offer unrivalled flexibility with all their available auxiliary connections, ease of installation and a fully comprehensive suite of programmable features including: configurable inputs & outputs, one man test mode, diagnostics modes, output delays, 3 false alarm management modes, Twin Wire zones and in-built networking capabilities. The **FirePro+** range also includes a fully functional repeater panel, remote display unit, relay & output card and a sounder circuit extension card. The display uses super bright, clearly labelled LED indicators and the simple colour coded buttons gives the end user the confidence to correctly manage their fire alarm system.

NETWORK UP TO
8
CONTROL PANELS &
REPEATERS

Networking is available across all FirePro+ control panels. With the simple addition of a comms card up to 8 control panels can be networked in a fault tolerant loop. The network is fail safe, a single open or short circuit on the loop will not stop the communications. Any combination of panel size can be used from 8 to 32 zones and in any order.


In addition to the 8 control panels up to 8 repeater panels or remote display units can be added to the network.

Programming Features

- Non latching zones
- 3 x False alarm management modes
- Set delays to outputs
- Set Twin Wire mode per zone
- Two independent programmable inputs
- All outputs, relays and sounder circuits are independently programmable
- Disable zones, sndr ccts, aux & delays

Technical Specifications

No of zones	2, 4, 6, 8, 12
Cabinet size	460mm W x 310mm H x 85mm D
Battery capacity	Min: 2 x 3.2Ah 12v SLA, Max: 2 x 7Ah 12v SLA
Std zone card	4 x conventional/Twin Wire fire zones
Hi Spec zone card	4 x conventional/Twin Wire fire zones, 2 x sounder circuits, 2 x switched negative outputs, 1 x aux relay




Twin Wire Mode

Twin Wire mode saves up to 40% in installation costs by allowing audio visual devices to be connected to the same pair of cables as the detectors & call points. Twin Wire mode requires 'Sav-Wire' detector bases & call points.

Order Codes

P-8000	Control panel, 2 zones, 2 sounder ccts
P-8001	Control panel, 4 zones, 2 sounder ccts
P-8006	Control panel, 6 zones, 2 sounder ccts
P-8002	Control panel, 8 zones, 4 sounder ccts
P-8003	Control panel, 12 zones, 4 sounder ccts
TPCA04-S	Standard zone extension card
TPCA04-H	Hi Spec zone extension card
P-8004	12 zone fully functional/passive repeater panel
P-8005	LCD remote display unit
TPCA05	Network comms card
OPCARD-8	8 way relay/output card
SNDEXT-4	4 way sounder cct extension card
FMK-XLEN	Recessing bezel for control panels
FMK-ECL	Recessing bezel for XLEN-R-12 repeater panel

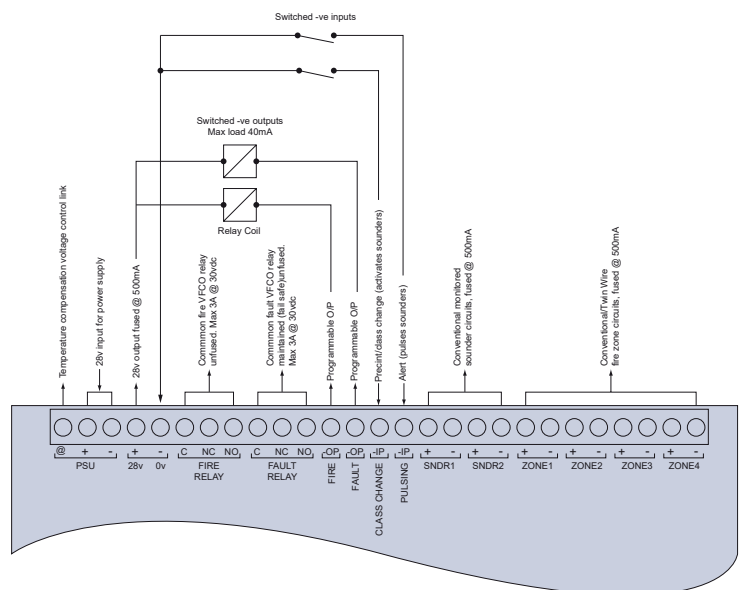

Units 2-4 The Pavilions, Bridgefold Road,
Rochdale OL11 5BY

Tel: 01706 658880
Fax: 01706 658918

Email: sales@eufireandsecurity.com
Web: www.eufireandsecurity.com