

TECHNICAL DATASHEET

Part Numbers and Product Order Codes:-


Part Number	- - - - -	EV-MCP RESET
Description	- - - - -	Analogue Evolution Type A Indoor Manual Call Point
Computer Reference Number	- - - - -	F16N82003 – Surface Mount F16N82008 – Flush Mount

Technical Specifications:-

Operation Method	- - - - -	Non Frangible, Resettable
Operating Element	- - - - -	Microswitch
Operating Voltage	- - - - -	20V d.c. to 35V d.c.
System Voltage	- - - - -	35V d.c.
Quiescent Current	- - - - -	200µA
Alarm Current	- - - - -	2mA (LED ON)
Operating Temperature	- - - - -	- 10°C to + 55°C
Storage Temperature	- - - - -	- 25°C to + 70°C
Charging Time	- - - - -	1 minutes
Relative Humidity	- - - - -	≤ RH95% non-condensing.
I.P. Protection Rating	- - - - -	IP24
Addressing Method	- - - - -	8 Way DIL switch.
Material	- - - - -	POM / Polycarbonate
Dimensions	- - - - -	87mm x 87mm x 23mm
Mass	- - - - -	115gms
Connections	- - - - -	Flying Leads
EMC Conformance	- - - - -	EMC conformance to BSEN50130-4
CE Conformity	- - - - -	EN54-11:2001/A1:2005
CPD Number	- - - - -	2431-CPD-232.1690
DoP Number	- - - - -	1690

All wiring must conform to the current edition of IEE Wiring regulations and BS5839 Part 1
All loop Cable Screens shall be connected together, but must be Isolated from Ground. Cable Screens shall be connected to Earth Ground within the Control Panel ONLY.

Dimensions

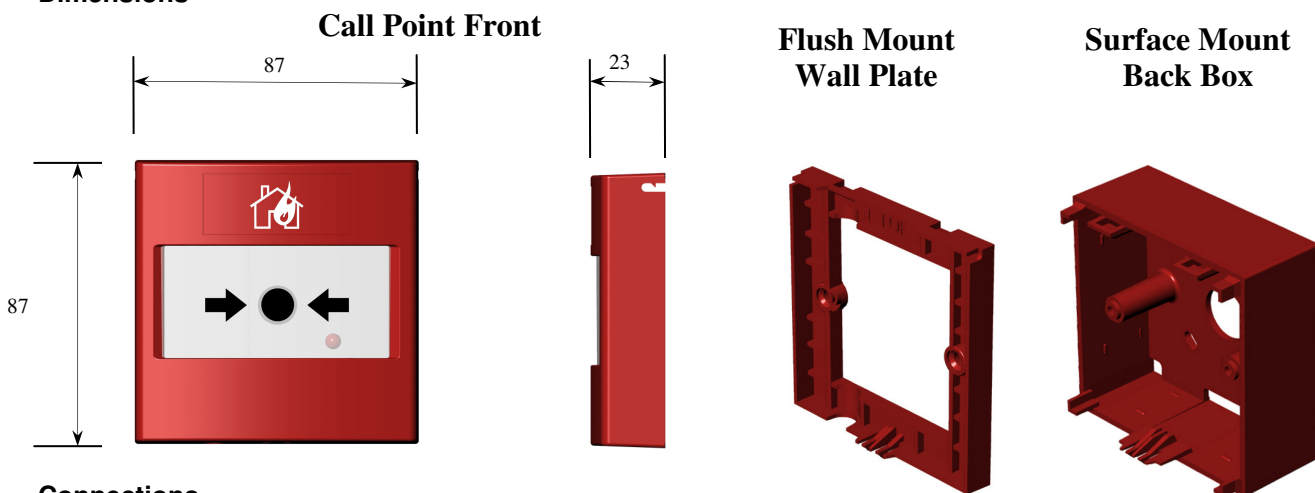

Connections

