

# EFBW5IN1DET - BiWire Ultra detector 5 in 1



The BiWire Ultra range offers a multi-mode, 5 in 1 detector, approved to both EN54 parts 5 & 7, which covers many building needs. It's quick and simple to install with a stylish low profile design. The detector is mounted on our standard conventional base (FXN520). Each detector is fitted with a 360° viewable LED for indication.

This 5 in 1 detector can be configured to operate as either an optical detector, photo-thermal detector or 1 of 3 heat detector modes (rate of rise and 2 fixed heat models) using the four position switches located at the back of the detector. The EFBW5IN1DET is certified for use in all 5 modes.

## Features

- Five modes in one detector
- Offers a range of sensor types
- 360° indicator LED using lightpipe technology
- Quick and simple to install
- Easy to maintain/service

## Benefits

- Suitable for a broad range of applications
- Wide viewing angle for increased LED visibility
- Positive "lock" indication
- Discreet design for incorporation into any decor


# Specifier's guide

## 4.3 Accessories

### Technical specification

<b>Code</b>	<b>EFBW5IN1DET</b>
Description	Detector 5 in 1
Standards	EN54 Part 5 & 7 2001
<b>Supply ratings</b>	
Operating voltage	15V DC to 30V DC
Standby current	30µA (max)
Startup current	340µA (max)
Alarm current	25mA (max)
<b>Fixing information</b>	
Mounting position	Ceiling in open areas
Mounting options	Surface mount with FXN520 base
Area coverage	100m <sup>2</sup> (subject to local standards)
System wiring	2 Core
<b>Environmental</b>	
Operating temperature	-20°C to 75°C (dependent on setting)
Humidity (non condensing)	0 to 93%
<b>Physical</b>	
Construction	PC/ABS
Colour	White
Dimensions excl base (dia x depth)	104mm x 42mm
Dimensions incl base (dia x depth)	104mm x 55mm
Ingress protection	IP40
EMC	CE Marked
<b>Compatibility</b>	
Suitable for use with	Eaton's BiWire Ultra fire system

### Dimensions

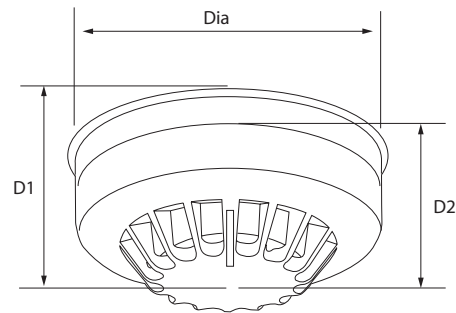

Dia (mm)	D1 (mm)	D2 (mm)
104	55	42

### Performance

Feature	Optical smoke mode	Photo-thermal mode	Rate of rise mode	Fixed heat 77 °C mode	Fixed heat 92 °C mode
Area coverage (subject to local standards)	100m <sup>2</sup>	100m <sup>2</sup>	50m <sup>2</sup>	50m <sup>2</sup>	50m <sup>2</sup>
Heat class	N/A	A2S	A1R	BS	CS
Alarm temperature	N/A	60 °C	60 °C	77 °C	92 °C

### Installation

1. Detectors are fixed and wired via common mounting base.
2. Cable entry into base can be rear or side.
3. A locking facility is provided which can be activated if required to prevent unauthorised detector removal without the use of a special tool.
4. Positive click mechanism incorporated to provide clear indication when detector is correctly located in base.

### User interface

1. Red LED to indicate alarm condition.
2. Amber LED to indicate chamber fault/drift compensation limit.
3. All wiring connections are via a common mounting base (supplied separately).

### Catalogue numbers

Description	Code
Detector 5 in 1	EFBW5IN1DET
Standard base	FXN520