

# CAB300

## Intelligent addressable standard



The intelligent addressable sensor standard base (CAB300) has been designed for flexibility, simplicity and speed of installation.

The CAB300 is compatible with Eaton's range of intelligent addressable sensors and fire systems.

This intelligent addressable standard base incorporates a purpose designed shorting link to ensure wiring continuity if a sensor is removed.

This device also has a retaining clip to provide positive feedback when the sensor is correctly fitted and a retaining clip that can be replaced with locking device (supplied with base) to prevent unauthorised sensor removal.

### Features and benefits

- Integral sensor shorting link
- Separate loop in and loop out terminals
- Stand off fixing feature
- Accepts side entry cables
- Selectable sensor locking feature
- Quick and simple to install
- Common mounting base for Eaton's intelligent addressable sensors
- Positive "lock" indication
- Multiple cable entry points
- Easy to maintain/service

# Specifier's guide

## 2.4 Accessories

### Technical specification

<b>Code</b>	<b>CAB300</b>
Description	Standard base
<b>Physical</b>	
Construction	PC/ABS
Colour	White
Dimensions (Dia x D)	104mm x 22mm
<b>Compatibility</b>	
Suitable for use with	Eaton intelligent addressable sensors


### Installation

1. Separate terminals are provided for loop in and loop out connections.
2. Each terminal can accept up to 2 x 2.5mm cables.
3. Base incorporates a substantial cable entry aperture in the rear of the base.
4. Breakouts are provided to enable the sensor base to sit neatly over surface cables and then enter via the rear entry aperture.
5. Base mounting incorporates a stand off feature to help prevent distortion when mounted on an uneven surface.
6. Fixings are suitable for standard BESA box or direct fixing to suitable surface.

### User interface


1. Heavy duty terminals are provided for each connection, each terminal can accept 2 x 2.5mm cables
2. Separate loop in and loop out terminals are provided for each connection.

### Dimensions



Dia (mm)	D (mm)
104	22

### Standard connections

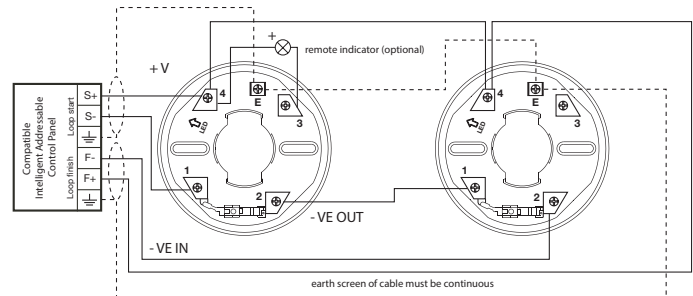

#### WARNING:

If using the outer connection on terminal 2, ensure the operation of the switch is not impeded and that there are no shorts between terminal 2 and the switch contact.

### Catalogue numbers

Description	Code
Standard base	CAB300
Optical smoke sensor	CAP320
Photo/thermal sensor	CAPT340
Multi-mode heat sensor	CAH330