
KEYGUARD

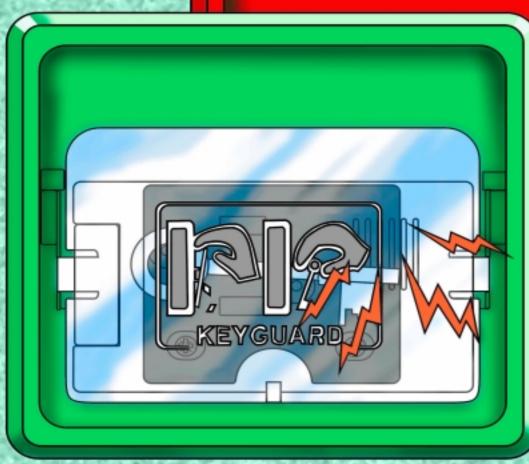

FEATURES

SNATCH OFF PLASTIC LID

INTEGRAL ELECTRONIC ALARM

CAN BE WIRED TO EXISTING FIRE OR SECURITY SYSTEMS

KEYGUARD

is a custom designed plastic box to which a clear plastic window can be fitted in order to retain a key or access control card. A recess enables the operator to remove the window in an emergency to retrieve the key. Immediately the lid is removed an integral electronic sounder warns others in the vicinity that key security has been breached. The lid is designed in such a way that it cannot be refitted after removal. Replacement lids are readily available from local stockists or direct from Hoyles. The battery can be tested periodically without damaging the lid.



KAC Alarm Company Limited, Units 15-19 Trescott Road, Redditch, Worcestershire, B98 7AH, Engalnd.
Tel +44 (0) 1527 406655 Fax +44 (0) 1527 406677 e.mail: sales@kac.co.uk

ADVANTAGES

SPECIALLY DESIGNED NON HAZARDOUS PLASTIC LID.

SOUNDER ALERT BEFORE KEY IS REMOVED.

USES

- FIRE EXIT DOORS FILING CABINET KEYS COMPUTER ROOMS ACCESS CONTROL SYSTEMS MASTER KEYS FOR COMPUTERS ETC.
 - RESTRICTED ACCESS AREAS

KEY PLATE


Key Plate conceals microswitch, battery (PP3 or equivalent) and electronic sounder..

CLEAR WINDOW

Clear plastic window enables key to be easily seen and cannot cause injury when removed. Safe in food preparation areas.

MAIN BODY

Architecturally designed main body in a tough resilient composite.



Large key chamber

KEY CHAMBER

will accept most commonly available keys and standard cards for card access control systems.

> The Keyguard is available in three different versions to satisfy various requirements

REVGUARS

ORDERING THE KEYGUARD

RED GREEN K1000R K1000G K1020R K1020G

KEYGUARD No Alarm K1010R K1010G KEYGUARD With Integral Alarm **KEYGUARD** With Microswitch for **Connecting To Remote Alarm** Systems.

K1030W

spare plastic Windows (Pack Of Four) Fits All KEYGUARD Products.

ALL KEYGUARDS ARE SUPPLIED WITH LANGUAGE **NEUTRAL GRAPHICS AS WELL AS FIXING SCREWS** AND PLUGS.



Document Ref. TECH:005 January 2002

INSTALLATION

The main body is a one piece moulding therefore flush fitting is simple to achieve.

