



## FireCell Call Point

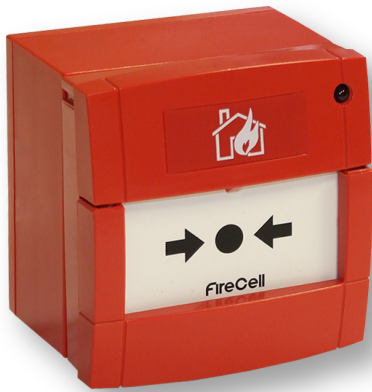

The FireCell Wireless Call Point is quick and easy to install and offers individual addressing at the Fire Control Panel.

Features include dual band 868MHz operation, auto adjusting power output, fire indication LED, resettable element, anti tamper and a test key.

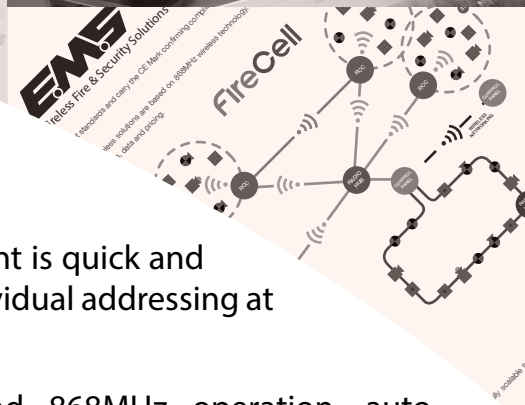









This device is third party EN certified and compatible with the EMS FireCell system, EMS Fusion Radio Loop Module (RLM) and EMS Wireless Zone Monitor (WZM).

A transparent hinged cover is also available, for protection against accidental operation in busy environments.

### Key Features

- Dual band 868MHz operation
- Fire indication LED
- Resettable element
- Anti tamper locking
- Third party EN certified
- Optional protective cover available

### Technical Data

 -10°C to 55°C	 0 - 14 dBm (auto adjusting)	 <b>CE 10</b> 0359-CPR-0038
 6 x AA alkaline batteries	 89mm(W) 92mm(H) 70mm(D)	 <b>EN</b> EN54-11 & EN54-25
 IP24, indoor use only	 0.4kg	 FC-200-002 ( <i>Wireless Call Point</i> ) FC-FGCOVER ( <i>Protective Cover</i> )
 868MHz		