

# Flashni - Sounder with Xenon Beacon

The Flashni is an audible and visual device which requires one single installation point. This greatly reduces installation costs and is less obtrusive than two separate devices. Versions are available with the sounder and beacon linked, or with separate terminals for independent operation.





## Technical Specification

Voltage	9 - 15Vdc (12Vdc version) 18 - 28Vdc (24Vdc version) (*1)
Current	110mA 12Vdc version (Typical Tone 5) 68mA 24Vdc version (Typical Tone 3)
Sound Output	103dB(A) 12Vdc version (Typical Tone 5) 101dB(A) 24Vdc version (Typical Tone 3)
Tones	32
Flash Power	0.7j
Flash Rate	1Hz
Volume Control	10dB
Monitoring	Reverse polarity
Temperature	- 10°C to + 55°C
Protection	IP54 (s)* IP65 (d)*
Construction	ABS, PC lens
Weight	0.33Kg
Colours	Red or white
Lens Colour	Red, amber, blue, green or clear

(\*1) 110 / 230Vac when used with a Deep powered base.

(s)\* Shallow Base

(d)\* Deep / U Base

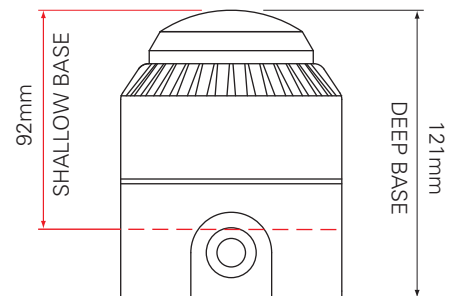

## Features

- 32 tones (user selectable)
- 12V or 24V
- Secure clip fit base
- Volume control

## Benefits

- Fire approved and Signalling tone options
- For Fire, Security and Signalling
- Quick fitting for easy installation
- Reduce output to suit application

## Reference

FL/RL/R/S SWITCH

## Catalogue No.

640025FULL-0061X

## Description

Flashni Sounder/Beacon, Red Lens, Red Body, Shallow Base, Tone Select Switch.

FL/RL/R/D SWITCH

640031FULL-0111X

Flashni Sounder/Beacon, Red Lens, Red Body, Deep Base, Tone Select Switch.

FL/AL/W/D SWITCH

640024FULL-0060X

Flashni Sounder/Beacon, Amber Lens, White Body, Deep Base, Tone Select Switch

FL/CL/W/D 12V SND5

640206FULL-0089

Flashni 12V Sounder/Beacon, Clear Lens, White Body, Deep Base, Tone 5

FL/BL/W/D 24V

640016FULL-0011

Flashni XE, Deep Base, 24V, White Base, Blue Lens

FL/CL/R/D/SEPARATE/  
SWITCH

640466FULL-0282

Flashni XE, Deep Base, Red Base, Clear Lens, Separate Switch