



A key operated switch for secure locations where restricted access is required. Two position switches are available.

Features

- Clip fixing of front cover
- Key activation
- Suitable for use on systems up to 230Vac
- Two position switch

Benefits


- Secure and convenient
- Suitable for where restricted access is required
- Offers complete flexibility
- Highly versatile

Technical Specification

Voltage	9 - 30Vdc / 230Vac
Current Rating	10A @ 24Vdc 2A @ 230Vac
Switching	1 x NO contact 1 x NC contact
Operating Method	Key - removable
Temperature	- 10°C to + 55°C
Protection	IP24D
Construction	ABS
Weight	0.19Kg
Colours	Red*

* Other colours available - minimum order required.

Dimensions

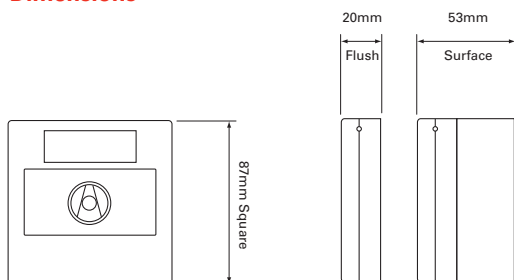

Catalogue Numbers

Reference	Cat No	Description
CXK/2/Y/BB	4942110FUL-0036	Keyswitch 2-Way, Yellow (including back box)
CXK/2/R/BB/4T	4942010FUL-0047	Keyswitch 2-Way, Red (including back box)