

SOCKET UNION

(ABS003 - 27mm)

Used for breaking a section of aspirating smoke detection pipe network for maintenance purposes.

This device is designed for aspirating fire detection only.

Installation Instructions:

Use the correct solvent Plusbond 3019.

Do not paint.

Keep pipe clean and free from dust.

Do not install in direct sunlight.

Only install with approved pipe.

Do not use solvents to clean,

only soapy water.

Do not over tighten.

Keep O'Ring in place.


Ensure that the socket union locks

into position when tightening.

Part No. ABS003 - 27mm

Pipe colour RED

Diameter Tolerance +/- 0.15mm

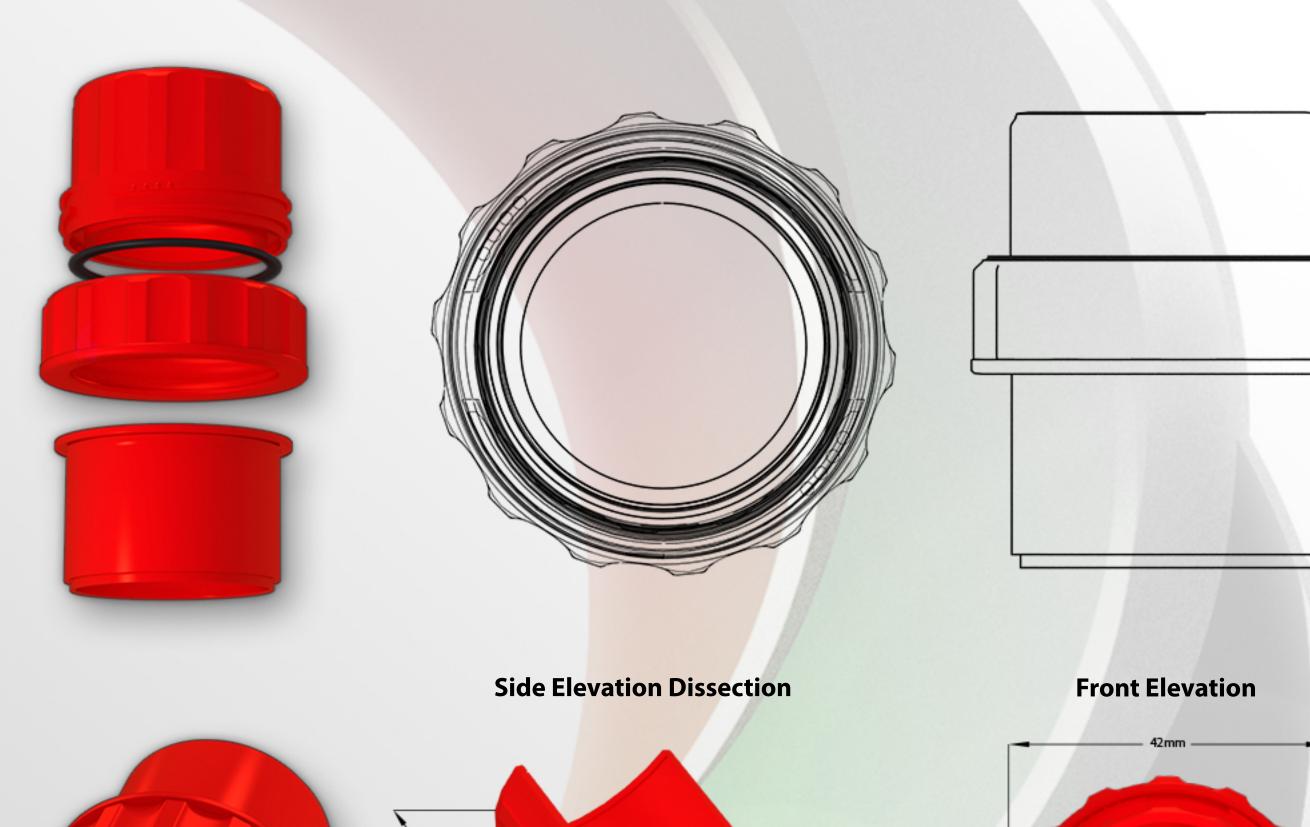



Nitrile Rubber O'Ring

Thermal Deflection Temr

RAW MATERIAL DATA

Acrylonitrile Butaduene Styrene

Kumho ABS 750

Specific Gravity 1.04 Test Method ASTM D792

Molding Shrinkage -Flow 0.0040 to 0.0070 in/in Test Method ASTM D955

Test Method ASTM D638

Tensile Elongation

Flexural Modulus Yield, 73°F (23°C) 0.118 in (3.00 mm)

312000 psi

9230 psi

1.97 in (50.0 mm), 15%

Test Method ASTM D638

Test Method ASTM D638

Test Method ASTM D790

Test Method ASTM D256

Test Method ASTM D785

Rockwell Hardness (R-Scale) 108

Noched Izod Impact

Flexural Strength Yield, 73°F (23°C)

0.118 in (3.00 mm)

Mechanical: Tensile Strength Yield, 73°F (23°C) 1.97 in (50.0mm)

6670 psi

Melt Mass - Flow Rate (MFR) 200°C/21.6 kg 47 g/10 min 200°C/5.0 kg 4.1 g/10 min 220°C/10.0 kg 34 g/10 min Test Method ASTM D1238

Deflection Temperature Under Load 264 psi (1.8 MPa), Unanneald 185°F/85°C Test Method ASTM D648

73°F(23°C), 0.126 in (3.20 mm), 5.5 ft·lb/ir 73°F(23°C), 0.252 in (6.40 mm), 4.8 ft·lb/ir

Vicat Softening Temperature 203°F/95°C Test Method ASTM D1525

Flamibility

Flame Rating
0.0630 in (1.60 mm) HB
0.0866 in (2.20 mm) HB
0.126 in (3.20 mm) HB
Test Method UL 94

Bisson Ltd
Unit 11, Eldonwall Trading Estate,
St.Phillips, Bristol, BS4 3QQ

Tel: 0117-967-9999 Fax: 0117-961-9261 http://www.abspipesandfittings.co.uk

©All rights reserved. Bisson Ltd