



SigTEL

16-128 LINE EMERGENCY VOICE COMMUNICATION SYSTEM


- Modular 16-128 line system
- Meets and exceeds the requirements of BS 5839-9 when correctly installed
- Ideal for disabled refuge, fire telephone & stadium marshalling applications
- Wall-mounting CCU 16 line Master Control Unit can be connected to up to seven SCU 16 line Slave Expansion Units
- Separate ECU-32 Desk Control Unit allows operators to communicate with up to 32 outstations using true duplex speech (64 & 128-way versions also available)
- Type B 'Disabled Refuge' outstations available in stainless steel or green steel (flush, surface and weatherproof options available)
- Type A 'Fire Telephone' outstations available in locking or non-locking red steel cabinets
- Unique 'auto-learn' facility allows fast network set up
- All extensions can be named with user-defined text of up to 15 characters
- Fully monitored hardware and software
- System operates at 24 VDC
- In the event of mains failure, operation can be maintained for 24 hours (standby) and 3 hours (in use) using 2 x 12V 7 Ahr batteries
- Optional line tester allows cable faults to be checked prior to connection
- Ideal for hotels, shopping malls, office blocks, transport terminals, banks, sports stadia, auditoria, etc.
- SigTEL 'Compact' system also available - ideal for systems up to 16 lines (expandable to 64)



Our SigTEL 16-128 line emergency voice communication system is ideal for use in all medium-to-large sized disabled refuge or fire telephone applications.

In disabled refuge applications, it allows people who cannot easily evacuate a building to communicate with a central control point during a fire emergency. In fire telephone applications, it allows building management, the emergency services and fire marshals to communicate with each other before, during and after a fire.

The system is fully monitored, extremely cost-effective and meets and exceeds the requirements of BS 5839 part 9 when correctly installed.

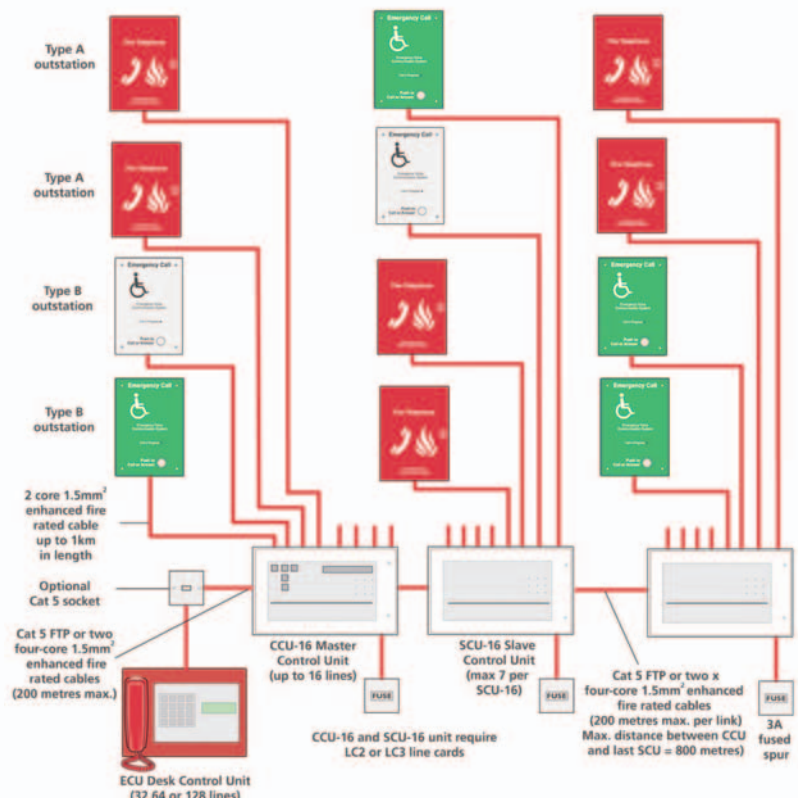

A typical SigTEL 16-128 Line system

About SigTEL

Our SigTEL 16-128 line EVC system comprises a range of sophisticated control equipment (described below) designed to connect to up to 128 'outstations'. Typically located in a building's control room, the control equipment allows management and/or the fire services to communicate via a telephone-style handset with the system's 'outstations'. Two types of outstation are available - Type A (fire telephone-style for fire telephone/stadium marshalling applications) and Type B (handsfree intercom-style for disabled refuge applications). Both types of outstation connect to the system's controller using two cores of 1.5mm² enhanced fire rated cable of up to 1km in length.

Key system components

Control Equipment

Our modular 16-128 line control equipment comprises one **CCU-16 16 line Master Control Unit** and up to seven **SCU-16 16 line Slave Expansion Units**.

Line cards are not included and **MUST** be purchased separately. For every two Type A outstations connected, an **LC2 2-Way Line Card** is required and for every two Type B outstations, an **LC3 2-Way Line Card** is required.

A separate ECU Desk Controller is also required to allow operators to communicate with the system's outstations. Three versions are available, the **ECU-32**, which can control up to 32 lines; the **ECU-64** (up to 64 lines) and the **ECU-128** (up to 128 lines).

Note, the CCU-16 is supplied with a standard tone card that provides ringing, busy, alert and evacuate tones. If required an **SVMM message module** can be fitted to provide real speech for the same functions as the standard tone card.



Type A 'Fire Telephone' Outstations

Fire telephone and stadium marshal systems use 'Type A' telephone-style outstations. SigTEL's **Type A Outstations** comprise the **EVC301RPO** which includes a telephone handset in a push-to-open red steel cabinet and the **EVC301RLK** which is exactly the same but with a 'lift key' locking mechanism. They are typically located at entrances and fire-fighting lobbies to allow fire marshals to communicate with building control during an emergency. Their housings have openings which allow the phones to be heard and they are designed to be surface or flush mounted using the **301T-BEZ Bezel**.



Type B 'Disabled Refuge' Outstations

Disabled refuge systems use 'Type B' handsfree intercom-style outstations. SigTEL's **EVC302** range of **Type B outstations** offer true hands-free duplex speech and allow anyone in a refuge area to communicate with building control at the touch of a button and vice versa. Attractively finished in brushed stainless steel or green metal, they include connections for an optional induction loop system and a general purpose output that closes on activation of the unit for the optional connection of strobes, CCTV activation relays, etc. Flush, surface and weatherproof options are available.



FiTT Line Tester

Allows cable faults to be checked and cleared prior to equipment connection, greatly simplifying system commissioning.

SIGTEL 16-128 LINE CONTROLLERS

CCU-16	16 line master control unit with display Needs ECU desk unit, LC2/LC3 line cards & 2 x 12V 7Ah batteries
SCU-16	16 line slave expansion unit Needs LC2/LC3 line cards & 2 x 12V 7Ah batteries Max. 7 SCU-16 slaves per CCU-16 (i.e. up to 128 lines)
LC2	2-way Line Card for Type A Fire Telephone Outstations One card required per two Type A outstations in CCU or SCU
LC3	2-way Line Card for Type B Disabled Refuge Outstations One card required per two Type B outstations in CCU or SCU
SVMM	Two message card for CCU (optional)
SVMM/C	Custom message card for CCU (optional)
AFP385	Grey flush bezel for CCU-16 or SCU-16
ECU-32	32 line Desk control unit with handset and display
ECU-64	64 line Desk control unit with handset and display
ECU-128	128 line Desk control unit with handset and display
ECUWMB	Wall Mount Bracket for ECU-32, ECU-64, ECU-128

DISABLED REFUGE (TYPE B) OUTSTATIONS

EVC302F	Handsfree duplex outstation, stainless steel (flush)
EVC302S	Handsfree duplex outstation, stainless steel (surface)
EVC302GF	Handsfree duplex outstation, green metal (flush)
EVC302GS	Handsfree duplex outstation, green metal (surface)
BF359/1	IP66 enclosure, steel, for EVC302F/EVC302GF

FIRE TELEPHONE (TYPE A) OUTSTATIONS

EVC301RPO	Fire telephone EVC outstation, push to open
EVC301RLK	Fire telephone EVC outstation, lift key lock version
301T-BEZ	Red flush bezel for EVC301RPO and EVC301RLK

SIGTEL ACCESSORIES

FiTT	SigTEL EVC line tester
CATCON	Adaptor box to convert fire-rated cable to Cat 5
XSB	Blue xenon strobe, 12V
XSA	Amber xenon strobe, 12V
SDM	Strobe driver module, 12V
BC286/2	24V Volt 7.0 Ahr SLA battery (2 x 12V plus link wire)

Typical equipment required for a system with up to 16 lines

One ECU-32 desk control unit
Optional CATCON wall socket and back box
One CCU-16 master control unit
Two 12 volt 7 Ah batteries
One LC2 per two lines of Type A outstations
One LC3 per two lines of Type B outstations
One Type A or Type B outstation per line
One FiTT Telephone Line Tester

Typical equipment required for a system with up to 128 lines

One ECU-32, 64 or 128 desk control unit
Optional CATCON wall socket and back box
One CCU-16 master control unit
Up to seven SCU-16 slave expansion units
Two 12 volt 7 Ah batteries per CCU & SCU
One LC2 per two lines for Type A outstations
One LC3 per two lines for Type B outstations
One Type A or Type B outstation per line
One FiTT Telephone Line Tester