



Bulkhead Plus


Code: BP/351/ST/WH/865

SELF TEST - Bulkhead Plus Emergency Bulkhead, 3W, Maintained, IP65

CQR Emergency Bulkheads are available in 150lm, 1000lm & 1500lm variants with options available for standard and recessed mounting. Both fitting types are also available with manual or optional self-test functionality for easier maintenance.

Features & Benefits

- Class II, IP65, 3 hours emergency bulkhead
- Hinged gear tray with push fit terminals
- Maintained & non-maintained optionality as standard
- Installation – surface or recessed by mounting kit
- Manual test and Self-test options available
- Exit sign diffuser available to order
- 5 years warranty: full fitting and battery



Technical Data

IP Rating	65
-----------	----

Electrical

Battery	LiFePO4 3.2V 1500mAh
Voltage / Frequency	AC 220-240V 50/60Hz
Running Current (A)	0.032
Charging Power (W)	3.2
Emergency Power (W)	1
Power Factor	0.4
Inrush Current (A / us)	5A / 100us
Electrical Class	2

Features

Mounting Method	Surface
-----------------	---------

Photometric Data

Maintained Mode Lumens	150
Emergency Mode Lumens	150
CCT (K)	6500
Beam Angle	120°
Lumen Maintenance L80 (Hrs)	50000
CRI	80

Emergency

Emergency Duration (Hrs)	3
Maintained / Non-Maintained	Maintained & Non-Maintained
Self-Test	Yes



Mechanical

Mounting Method	Surface
Housing Material	Polycarbonate
Dimensions (LxWxH mm)	351x111x63

Warranty

Product Warranty	5
------------------	---



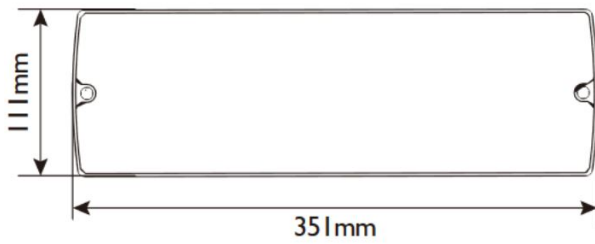

111mm x 351mm

90 0
180 270

C Halfplanes

180.0 0.0
270.0 90.0

Flux 163 lm
Maximum 417.40 cd/klm
Position C=270.00 G=25.00
Efficiency: 99.98%
Date: 18-02-2002
Asymmetrical

