


Exit Boxes

Code: SE/4/M/WH/865

CQR LED Emergency Slimline Exit Box c/w Arrow Up Legend - White

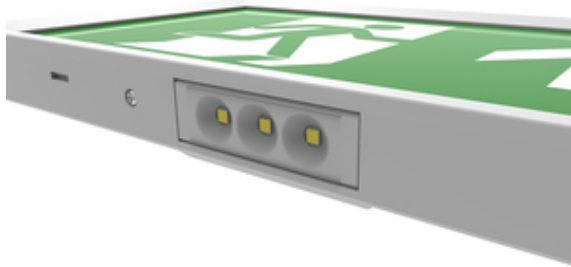

CQR Emergency Exit Boxes are available in black and white and with slimline design as standard. All are fitted with an adjustable downlight for installer ease at directing light at the correct angle.

Features & Benefits

- Emergency slim exit box
- Includes arrow up legend
- Other legends available separately
- 30 metre viewing distance
- Angle adjustable downlight
- Maintained & Non-maintained optionality as standard
- Self-test function available
- Available in white and black



Technical Data

IP Rating	20
-----------	----

Electrical

Battery	LiFePO4 3.2V 1500mAh
Voltage / Frequency	AC 220-240V 50/60Hz
Running Current (A)	0.03
Power Factor	0.4
Inrush Current (A / us)	4
Electrical Class	2

Features

Mounting Method	Wall
-----------------	------

Photometric Data

Emergency Mode Lumens	80
CCT (K)	6500
Beam Angle	103°
Lumen Maintenance L70 (Hrs)	50000
CRI	80

Emergency


Emergency Duration (Hrs)	3
Maintained / Non-Maintained	Maintained
Self-Test	No
Recognition Distance	30

Mechanical

Mounting Method	Wall
Housing Material	Polycarbonate
Dimensions (LxWxH mm)	330x185x29

Warranty

Product Warranty	5
------------------	---

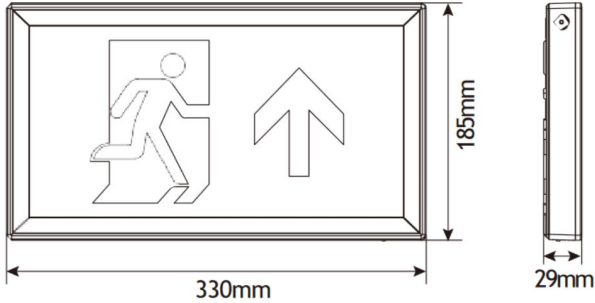

185mm x 330mm

90° 0° 180° 270°

C Halfplanes

180.0 0.0

270.0 90.0

Flux 96 lm
Maximum 465.01 cd/klm
Position C=270.00 G=75.00
Efficiency: 100.00%
Date: 25-03-2022
Asymmetrical

