



HO Twin Spot

Code: TS/8/NM/BK/865

BLACK – HO Emergency LED Twin Spot, 2x500lm, IP65

CQR Emergency Twin Spots are ideal for larger areas whether requiring our medium or high output versions, with narrow or wide beam angles and self-test options available.

Features & Benefits

- Emergency Twin Spots: 500lm & 1000lm versions
- 1000lm output version suitable for larger areas
- Narrow or wide beam angle options
- Self-test function available
- Available in white and black



Technical Data

CQR Security, 125 Pasture Road, Moreton, Wirral, CH46 4TH

Sales: +44(0)151 6061000 (9am to 5pm Monday to Friday) **Tech:** +44(0)151 606 6311

sales@cqr.co.uk | www.cqr.co.uk

Company Registration Number: 5192024 | VAT Number: 309 0409 27



IP Rating	65
-----------	----

Electrical

Battery	LiFePO4 6.4V 6600mAh
Voltage / Frequency	AC 220-240V 50/60Hz
Running Current (A)	0.06
Charging Power (W)	4.2
Emergency Power (W)	9
Power Factor	0.4
Inrush Current (A / us)	4A / 100us
Electrical Class	2

Features

Mounting Method	Wall
-----------------	------

Photometric Data

Emergency Mode Lumens	1000
CCT (K)	6500
Beam Angle	120°
Lumen Maintenance L70 (Hrs)	50000
CRI	80

Emergency

Emergency Duration (Hrs)	3
Maintained / Non-Maintained	Non-Maintained
Self-Test	No


Mechanical

Mounting Method	Wall
Housing Material	Polycarbonate
Dimensions (LxWxH mm)	300x287.5x68.5

Warranty

Product Warranty	5
------------------	---



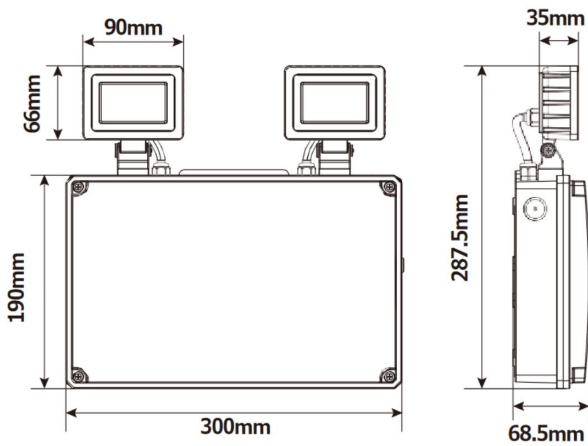

288mm x 300mm

C Halfplanes

180.0 — 0.0

270.0 — 90.0

Flux 251 lm
Maximum 372.19 cd/klm
Position C=105.00 G=5.00
Efficiency: 100.12%
Date: 02-04-2022
Asymmetrical

