





The Symphoni Voice+ is an ultra-low current sounder that can be supplied with up to 16 voice messages. Normally the unit is loaded with 3 commonly used messages. The sounder also has international tones available and a user selectable setting so that messages can be played without the use of a tone.

Features

- Up to 16 messages
- 7 user selectable tones
- Bespoke message creation
- Low 4mA current consumption


Benefits

- Fire, alert and general warning messages available
- Easy to configure at installation
- Any message, in any language
- Maximises the number of units on a circuit

Technical Specification

Voltage	9 - 60Vdc	
Current	4mA Low 8mA High	
Sound Output	100dB(A) Typical	
Tones	7 user selectable + no tone option	
Volume Control	10dB	
Monitoring	Reverse polarity	
Temperature	- 10°C to +55°C - 25°C to +70°C (WP)	
Protection	IP21C, IP33C (WP)	
Construction	ABS	
Weight	0.21Kg, 0.32Kg (WP)	
Colours	Red or white	

Dimensions

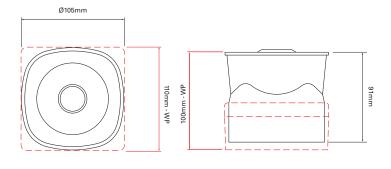



Catalogue Numbers

Reference	Cat No	Description
SYV/R/V+ VP001ASY	680003FULL-0003X	Symphoni Voice Sounder, Red
SYV/W1/V+ VP0001ASY	680004FULL-0004X	Symphoni Voice Sounder, White

Contact customer service for details on how to order voice messages