

SmartNet-Pro Wall Beacon Visual Alarm Device
with Sounder Radio Base

Part Number: SN.VAD1.RB10.1 /
SN.VAD1.RB10.2

Wall Mounting Beacon VAD with Sounder Radio Base (White/Red)

The Cygnus SmartNet wireless fire detection and alarm system is a network of battery powered, wireless fire detection and alarm products suitable for permanent installations, commercial premises and HMOs.

The Wall VAD Beacon with Sounder Radio Base is available for use with up to 511 other devices, serving small and large sites. It provides a ceiling mounting beacon with sounder in a single device.

Other products in the range include: Smoke and Heat Detectors, Manual Call Points, First Aid Alarms, Alarm Interface Unit and Control Panel.



Overview

- Reliable wireless mesh radio technology
- Completely wireless – no cables required
- Sensitive radio with up to 350m range
- 868MHz radio (915MHz also available)
- 3+ year battery life
- Designed to be EN 54 compliant
- Certified by Intertek
- Easy configuration via the Windows based CygnusConfig application
- Compatible with other Cygnus SmartNet devices

Features

	Beacon	Wall mounting Beacon VAD head
Beacon type	W-2.4-7	
Sounder	Built into radio base (3 volume settings)	
Silent test	Yes	
Tamper detection	Two (radio base and head)	

Parameters

Dimensions (mm)	123Ø x 95h (inc Beacon VAD)
Weight	482g
Operating temperature	-10°C to +55°C
Storage temperature	-10°C to +55°C
IP rating	IP21C, Type A (Indoor)
Relative humidity	>95% @ 25°C to 55°C

Power	
Operating voltage range	2.5 to 3.8V (from lithium batteries)
Main battery	3x ER26500 Li-SOCl ₂ (lithium thionyl chloride)
Backup battery	1x CR123 (must be fitted)
Battery Voltages	ER26500 = 3.6V nom. CR123 = 3.0V nom.
Power consumption	3mW
Battery life	Min 3 years (normal operation)

Radio	
Radio operating frequency	865 to 868 MHz
Radio category	Category 1
Channels	10 (with channel hopping algorithm)
Bandwidth	250kHz
Channel spacing	300kHz
Transmit power	10mW (maximum)
Duty cycle	<0.1%
Protocol	Cygnus mesh protocol
Encryption	TDES (64-bit payload, 192-bit encryption key)
Self-forming	Cygnus self-forming algorithm
Self-healing	Cygnus self-healing algorithm

Additional Information	
Beacon VAD flash rate: 1Hz and 0.5Hz	Beacon type: W-2.4-7
Model SN.VAD1.RB10.1	White
Model SN.VAD1.RB10.2	Red

Compliance	Sounder
------------	---------

Current:

- ETSI EN 300 220-1 V3.1.1 (2017-02)
- ETSI EN 301 489-1 V2.2.2 (2019-09)
- ETSI EN 301 489-3 V2.1.1 (2019-03)
- EN61000-6-3:2007 +A1:2011
- EN50130-4:2011 +A1:2014
- EN61000-3-2:2014
- EN61000-3-3:2013



- EN 54-3:2001+A1:2002+A2:2006
- EN 54-18:2005
- EN 54-23:2010
- EN 54-25:2008

Sounder Output (configurable)	80 to 98dB(A) at 1m
Volume Settings	3 levels
Number of Tones	36 configurable tones (10 certified to EN 54)

Ordering Information

Detector Head Options	Wall Mounting Beacon VAD (White)	SN.VAD1.1
	Wall Mounting Beacon VAD (Red)	SN.VAD1.2
Device Base(s) Options	Sounder Radio Base (White)	SN.RB10.1
	Sounder Radio Base (Red)	SN.RB10.2

Sounder Tones – EN 54-3:2001+A1:2002+A2:2006 Approved

#	Description	Pattern	Low	Med	High
1	554Hz, 0.1s / 440Hz, 0.4s (AFNOR NF S 32 001)		81	87	91
4	500 – 1200Hz, 0.5s / 0.5s OFF x 3 / 1.5s OFF (AS1670 Evacuation)		83	90	93
7	1200Hz – 500Hz @ 1Hz (DIN 33 404)		82	90	94
8	500Hz – 1200Hz, 3.75s / 0.25s OFF (AS2220)		85	91	95
10	970 Hz 0.5s ON/0.5s OFF (ISO 8201 LF BS5839 Pt1 1988)		80	87	91
14	800Hz/970Hz @ 2Hz (FP 1063.1 Telecom) – Default Fire Tone		82	89	92
17	970Hz continuous		81	87	91
22	800Hz – 970Hz @1Hz		84	89	94
26	Dual tone 800/630 Hz @2Hz		80	86	91
30	550Hz, 0.7s / 1000Hz, 0.33s		84	90	94

Sounder Tones – Not Approved

#	Description	Pattern	Low	Med	High
2	500 – 1200Hz, 3.5s / 0.5s OFF (NEN 2575:2000)				
3	420Hz 0.625s ON / 0.625s OFF (Australia AS1670 Alert tone)				
5	970Hz, 0.5s ON / 0.5s OFF x 3 / 1.5s OFF (ISO 8201)				
6	2850Hz (2900), 0.5s ON / 0.5s OFF x 3 / 1.5s OFF (ISO 8201 (US temporal HF))				
9	800 Hz continuous (LF continuous tone BS5839)				
11	2850Hz 0.5s ON/OFF (ISO 8201 HF)				
12	660Hz 0.15s ON / 0.15s OFF (Swedish fire signal)				
13	660Hz (Swedish All clear signal)				
15	1000 – 2500Hz, 0.5s / 0.5s OFF x 3 / 1.5s OFF (AS1670 Evacuation)				
16	950Hz 0.5s ON/ 0.5s OFF x 3 / 1.5s OFF repeat (US temporal LF)				
18	800Hz – 970Hz @ 3Hz				
19	800Hz – 970Hz @ 9Hz				
20	2400Hz continuous				
21	970Hz, 0.5s / 630Hz, 0.5s				
23	800Hz / 970Hz @ 1Hz				
24	2400Hz – 2900Hz @ 9Hz				
25	2400Hz – 2900Hz @ 3Hz				
27	400Hz continuous				
28	550Hz / 440Hz @ 0.5Hz				
29	1500Hz – 2700Hz @ 3Hz				
31	250Hz – 1200Hz @ 12Hz				
32	800 / 1000Hz 0.5s each (1Hz)				
33	Dual tone 800/630 Hz @2Hz - 1s ON / 7s OFF – Default First Aid tone				
34	Silent tone				
35	Test tone 800Hz 0.1s ON / 2s OFF				
36	2200Hz – 3500Hz 125ms / 3500Hz – 2200Hz 125ms (Cygnus 1 tone)				

IO Functions (for EN 54-18:2005)

Inputs:


- Radio messaging from other devices
- Installation tamper switch

Outputs:

- Radio messaging to other devices
- Sounder
- Visual Alarm Device (VAD) beacon

Beacon VAD

Beacon	Wall mounting Beacon VAD head
Beacon type	W-2.4-7
Flash colour	White
Flash rate	1Hz (1 second) and 0.5Hz (2 seconds)
Coverage	117m ³ cuboid volume coverage
Operating voltage range	2.5 to 3.8V (from radio base batteries)
Beacon Head Power consumption (nominal)	360mW, 100mA (when flashing)

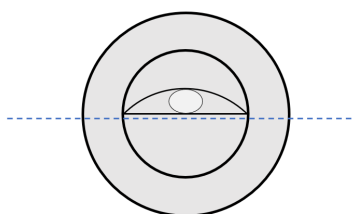

Ensure beacon line is horizontal and the lens is facing downwards



Install radio base with LED facing downwards

